


Type H

4 required
8 lbs.

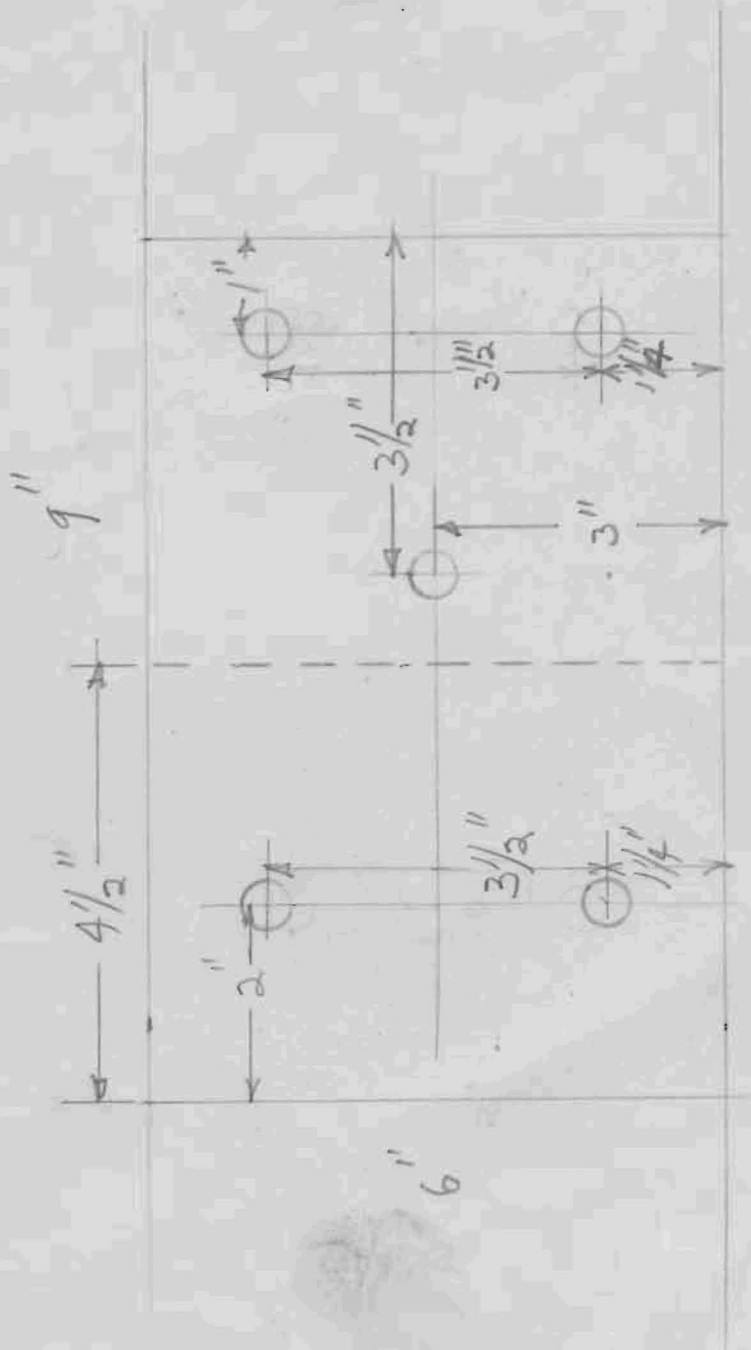

Type I


24 required.
29 lbs.



$3 1/2$




Type J
 12 required,
 17 lbs total.

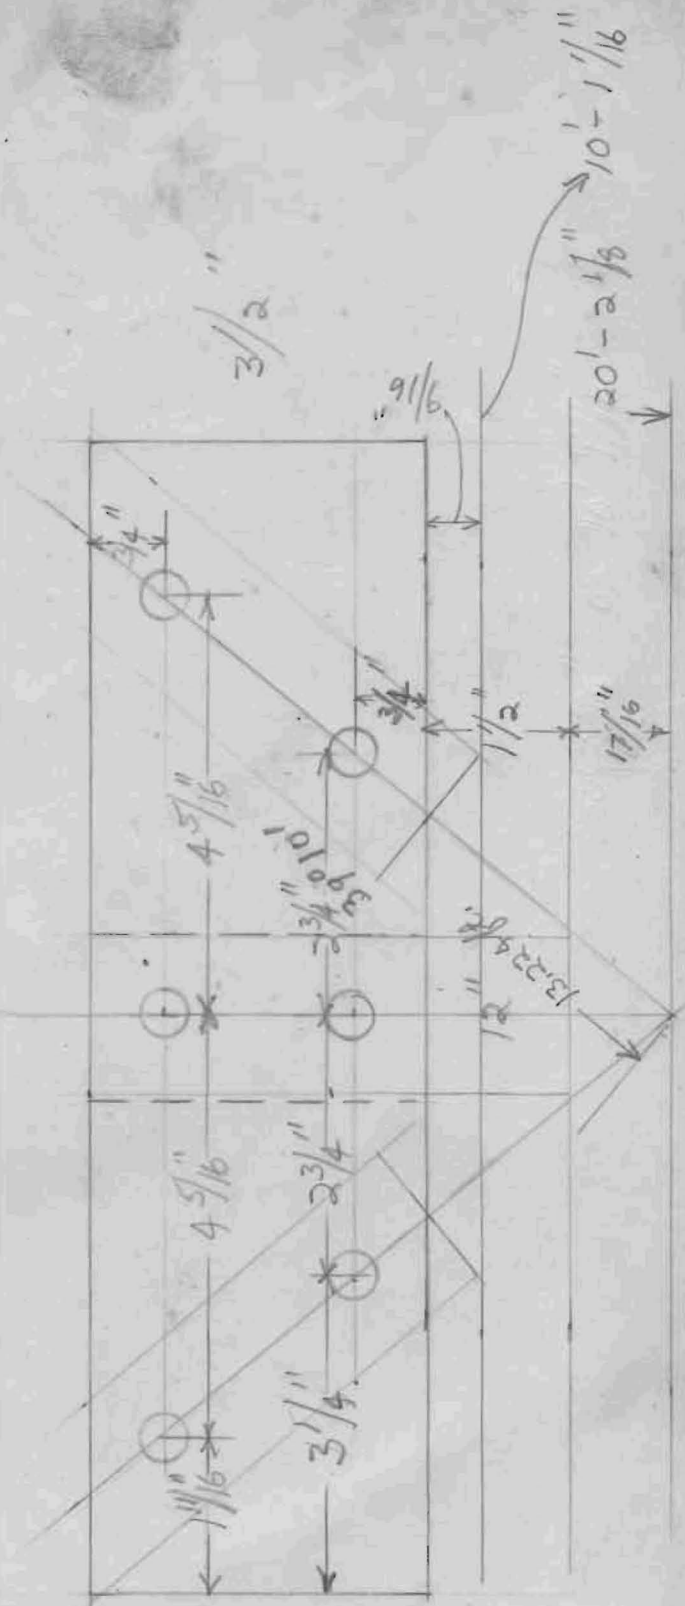





Type K
 12 required.
 22 total.

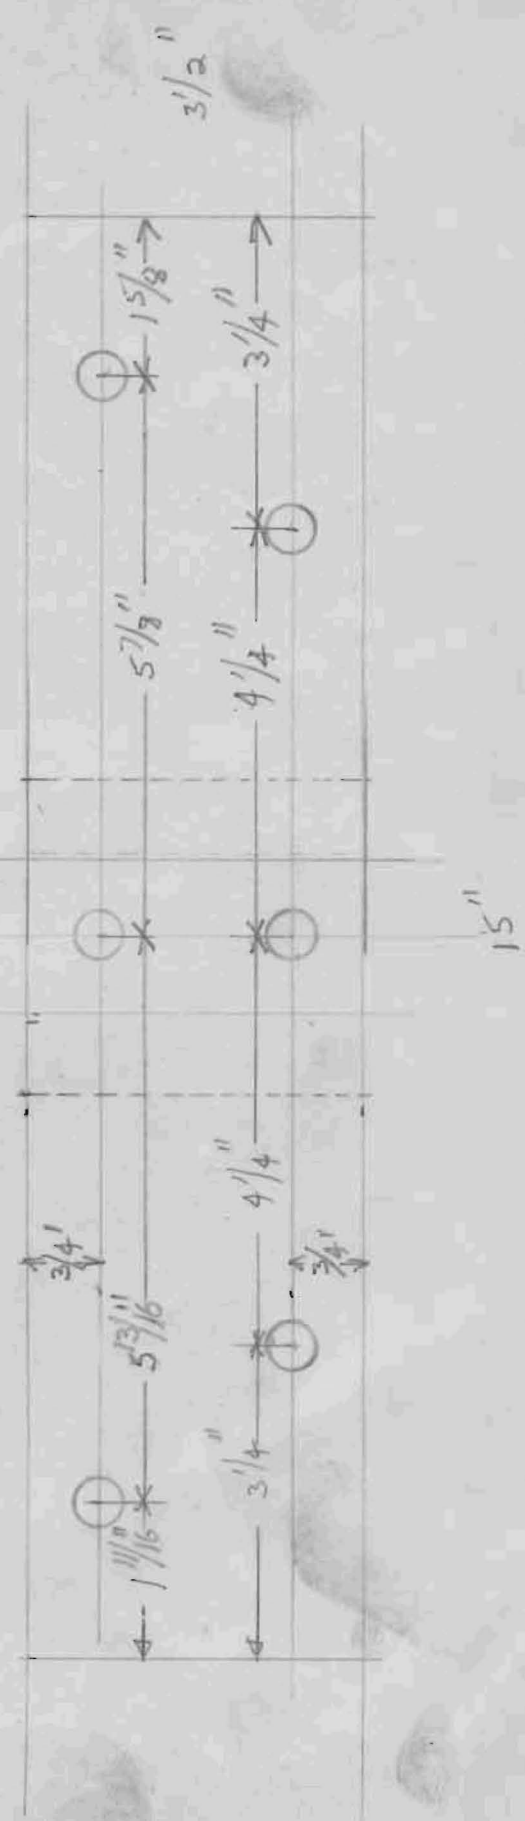

Type L
2 as shown

2 with holes reversed vertically
6 bolts in opposite directions

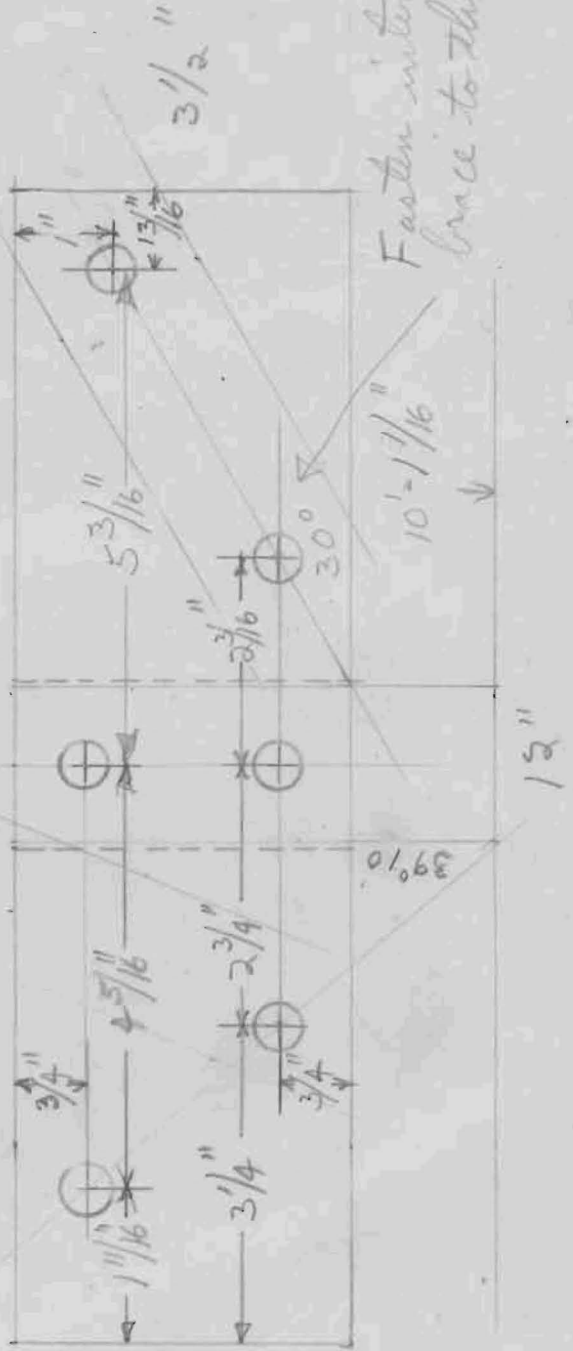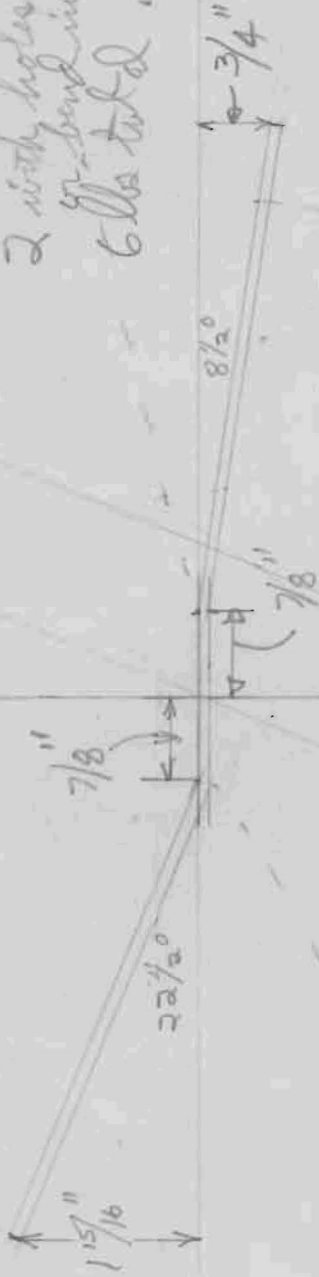


Fasten internal square
brace to this bolt



Type M

2 as shown


2 with holes reversed,
 6 the two identically
 or merely bend in opposite
 directions

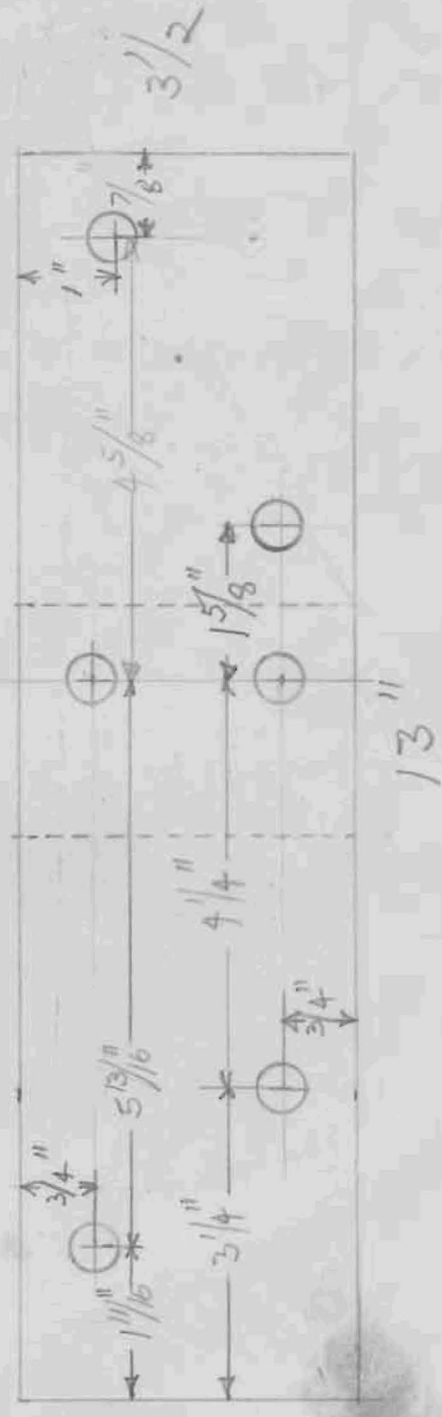

Type N

12 required.

17 lbs.

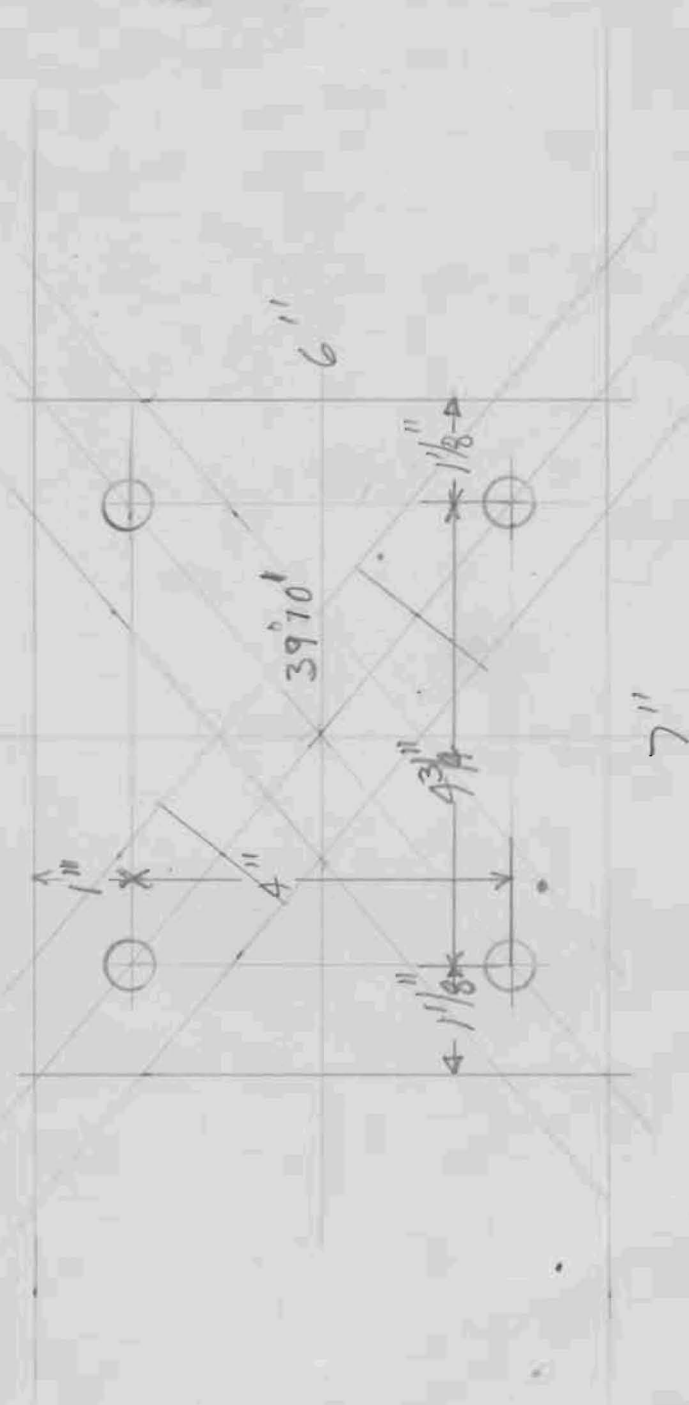

Type O
 16 required
 10 lbs total

